

SUSPENSION MOUNTING FRAME



EV3



EV4



EV5

EV3
EV4
EV5

Application

For open and closed tanks (not gastight)

Technical data

All OPTIMIX version applicable

Horizontal adjustment up to $\pm 60^\circ$

EV3: Cable guidance on the rope, optional on the mast

EV4: Cable guidance on the rope

EV5: Cable guidance on the mast, optional on the rope
At smell emissions

Gallow, base frame and wall support in ss304

Mast: 100 x 100 / 120 x 120 / 150 x 150 mm ss304

Rope winch galvanized (max. strain relief 650 or 1200 kg)
with ss316 rope \varnothing 8 mm

Optional: Rope winch in ss304 (max. strain relief 900 kg)

EV3

Doweling of the wall support in the inside tank wall
4-12 m tank height

EV4

Doweling of the wall support in the outside tank wall
4-12 m tank height

EV5

Doweling of the wall support on the inside tank wall.
Doweling of the gallow holder on the outside tank wall
4-12 m tank height

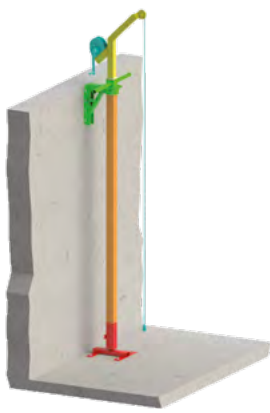

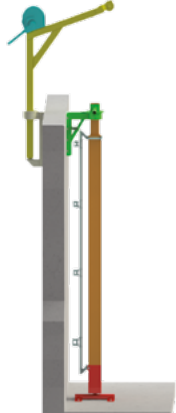
Other tank heights on request

Accessories (optional)

Height indication to determine the exact tank height of the agitator within the tank

SUSPENSION MOUNTING FRAME

EV3
EV4
EV5

Suspension mounting frame EV3 / EV4 / EV5		
EV3	EV4	EV5
		
Wall support with pvc-socket and swivel arm	Suspension bracket on the ceiling with pvc-socket and swivel arm	Wall support with pvc-socket and swivel arm
Gallow 100s	Gallow 100s	Gallow and wall support with pvc-socket on the outside

Note: 650s, 1200s and 900s rope winch possible on the EV5-gallow

Subject to technical changes

SUSPENSION MOUNTING FRAME EV3 LIGHT



Application

Suspension mounting frame for open concrete tanks
(not gastight)
Doweling of the wall support in the inside tank wall
Up to 7 m tank height

Technical data

Suitable for:
OPTIMIX 2A 8-720 / 2A 15-720 / 2A 22-720
Horizontal adjustment up to $\pm 60^\circ$
Base frame and wall support in ss304
Mast:
60 x 60 mm in ss316 (max. 4 m length)
80 x 80 mm in ss304 or ss316 (max 7 m length)
Rope winch in ss304 (max. strain relief 250 kg)
Optional: Rope winch in ss304 (max. strain relief 900 kg)
ss316 rope \varnothing 6 mm

